

# Zehnder Metropolitan Spa

Product data sheet



The innovative design of Zehnder Metropolitan Spa makes the bathroom that much nicer and more pleasant to be in. Ample cut-outs in this version offer plenty of space for large towels. Available in almost any colour and finish from the Zehnder colour chart.

## Benefits

- Smooth surface creates an elegant look
- Cut-outs for hanging and heating towels
- Convenient, individually adjustable towel hooks on request for hanging towels
- High proportion of radiation ensures comfort
- Light and seamless design enhances any room
- The right model for any setting
- Light airy look provided by distinctive triangular profile of frame
- Innovative hybrid welding technology guarantees maximum quality and high-end design

## Special benefits for hot water operation

- Elegantly enabled valve integration on request, which discreetly conceals connection fittings


## Special benefits for dual energy operation

- Factory-assembled, elegantly integrated electric heating element reduces cost of installation
- Dual energy operation provides warm towels and comfortable rooms all year round

## Special benefits for electric operation

- Simple temperature control due to user-friendly control device
- Customisable daily and weekly programmes for convenient, on-demand operation
- Timer function for on-demand operation
- Dry-running protection prevents temperature warning
- Comes ready-to-plug for easy and quick installation
- Factory-assembled electric heating element reduces cost of installation
- The electric radiator provides warm towels and rooms all the year round
- Energy-efficient and comfortable heating with innovative “open window detection”
- Electric operation provides warm towels and comfortable rooms all year round
- High energy efficiency due to compliance with the European Ecodesign Directive reduces energy costs
- Low energy consumption of only 0.5 W in stand-by mode for increased energy efficiency
- Increased safety with keylock
- Flexible control options: control device for wall mounting or base

## Model overview

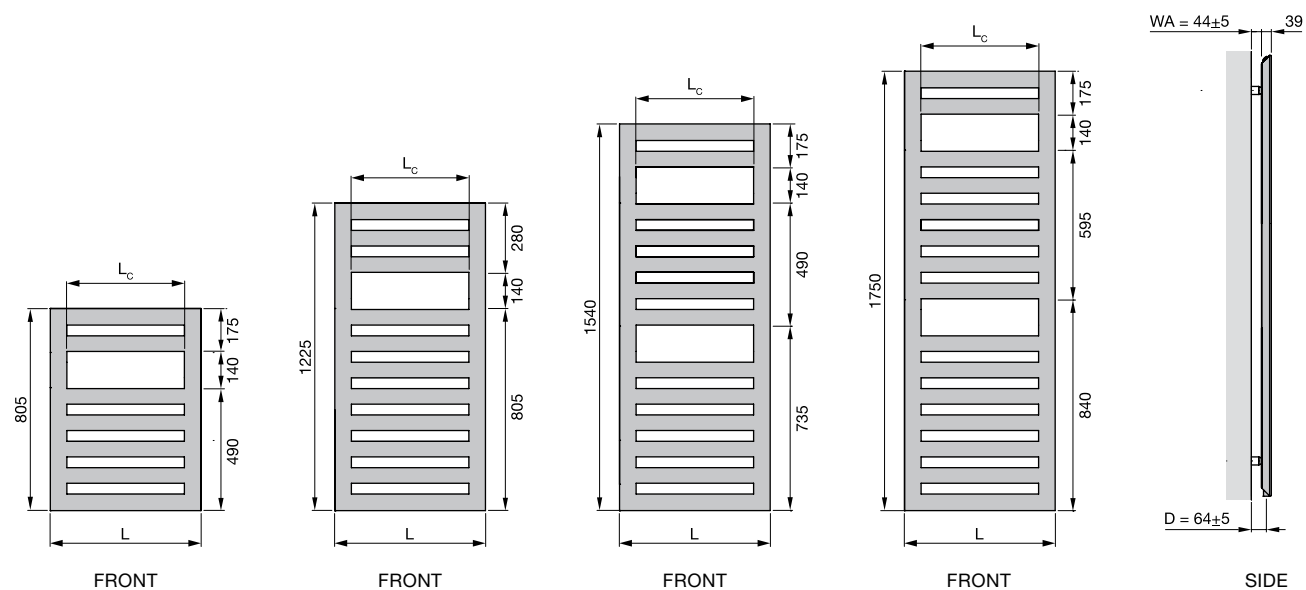

L = length  
 L<sub>c</sub> = length of cut-out  
 D = distance from wall to middle of connection  
 WA = wall clearance

Dimensions in mm

## Connection to hot water central heating system

Painted version

Model	H mm	L mm	L <sub>c</sub> <sup>1)</sup> mm	Thermal output				Classification electric heating element Watt
				75/65/20 °C <sup>2)</sup>	70/55/24 °C	55/45/24 °C	55/45/20 °C	
				Watt	Watt	Watt	Watt	
<b>MET-080-040</b>	805	400	260	327	236	144	173	-
<b>MET-120-040</b>	1225	400	260	474	341	208	249	-
<b>MET-150-040</b>	1540	400	260	582	419	255	306	-
<b>MET-180-040</b>	1750	400	260	654	472	289	345	-
<b>MET-080-050</b>	805	500	360	388	279	170	204	-
<b>MET-120-050</b>	1225	500	360	561	404	246	295	-
<b>MET-150-050</b>	1540	500	360	690	495	301	361	-
<b>MET-180-050</b>	1750	500	360	775	558	340	407	-
<b>MET-080-060</b>	805	600	460	445	319	194	233	-
<b>MET-120-060</b>	1225	600	460	645	463	281	337	-
<b>MET-150-060</b>	1540	600	460	792	567	343	412	-

## Connection for dual energy operation with integrated electric heating element

Painted version

Model	H mm	L mm	L <sub>c</sub> <sup>1)</sup> mm	Thermal output				Classification electric heating element Watt
				75/65/20 °C <sup>2)</sup>	70/55/24 °C	55/45/24 °C	55/45/20 °C	
				Watt	Watt	Watt	Watt	
<b>METM-120-050/GD</b>	1225	500	360	561	404	246	295	500
<b>METM-150-050/GD</b>	1540	500	360	690	495	301	361	600
<b>METM-180-050/GD</b>	1750	500	360	775	558	340	407	750

## Electric-only operation

Painted version

Model	H mm	L mm	L <sub>c</sub> <sup>1)</sup> mm	Output electric heating element
				Watt
<b>METE-080-040/GD</b>	805	400	260	300
<b>METE-150-040/GD</b>	1540	400	260	500
<b>METE-180-040/GD</b>	1750	400	260	600
<b>METE-120-050/GD</b>	1225	500	360	500
<b>METE-150-050/GD</b>	1540	500	360	600
<b>METE-180-050/GD</b>	1750	500	360	750
<b>METE-180-060/GD</b>	1750	600	460	900

H = height, L = length, L<sub>c</sub> = length of cut-out

1) number of cut-outs: 1 x for H = 805 mm and 1225 mm, 2 x for H = 1540 and 1750 mm


2) Nominal heat output according to EN 442

# Zehnder Metropolitan Spa

## Product types and connection options



Completo version with integrated valve

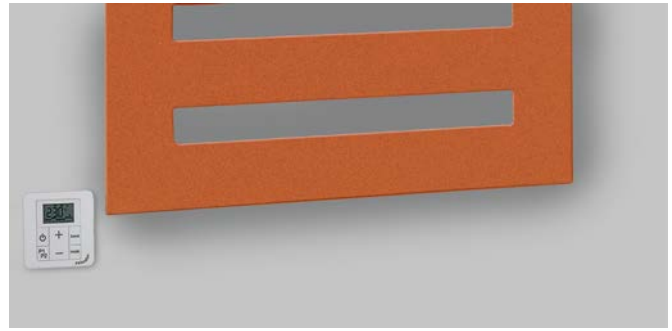

Electric operation version with remote control device.

V20180723, RAD\_DAS, SI\_en, subject to change without notice